





Profile de etansare rosturi constructie interne

Besaflex® conform standard companie

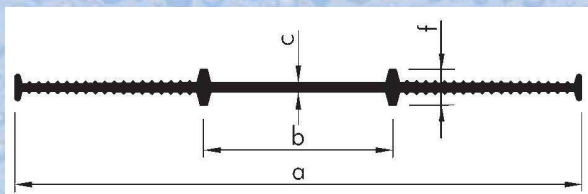

Tip	a	b	c	f
A 100	100	40	3,0	10
A 120	120	45	3,0	10
A 150	150	45	3,0	10
A 200	200	70	3,0	15
A 240	240	80	3,5	15
A 320	320	110	4,5	15
A 500	500	150	6,0	20


Nitriflex® conform DIN 18541

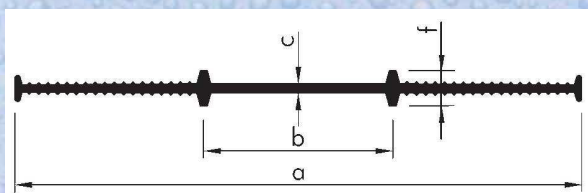

Tip	a	b	c	f
A 190 ¹⁾	190	70	3,5	15
A 240	240	80	4,0	15
A 320	320	110	5,0	15
A 500	500	120	6,5	20


¹⁾ conform DIN 18541 Partea 2

Elastoflex® conform DIN 7865

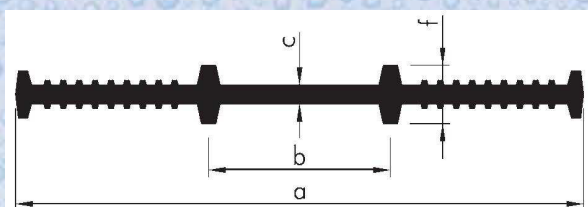


Tip	a	b	c	f
F 200	100	75	7,0	32
F 250	120	80	8,0	32
F 300	150	100	8,0	32
DIN 7865 partea 2		80	6,0	32
F 250-2	250			
F 300-2	300	100	6,0	32
F 350-2	350	120	6,0	32

Polyflex conform Standard companie

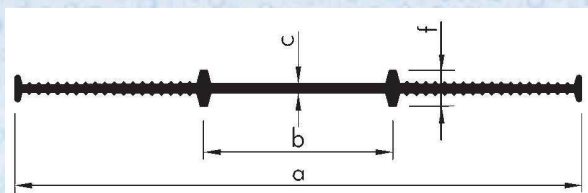

Tip	a	b	c	f
AP 200	200	80	3,0	15
AP 240	240	90	3,5	15
AP 320	320	110	4,5	15
AP 500	500	120	6,0	20

Besaflex® conform standard Marea Britanie(BS)

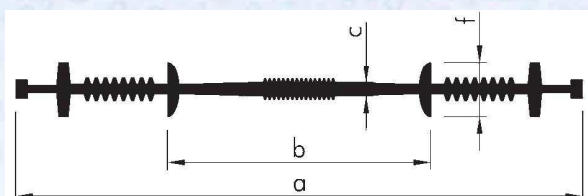

Tip	a	b	c	f
CC 150	150	116	5,0	20
CC 200	200	87	5,0	20
CC 250	250	116	6,0	24
CC 300	300	166	7,0	24