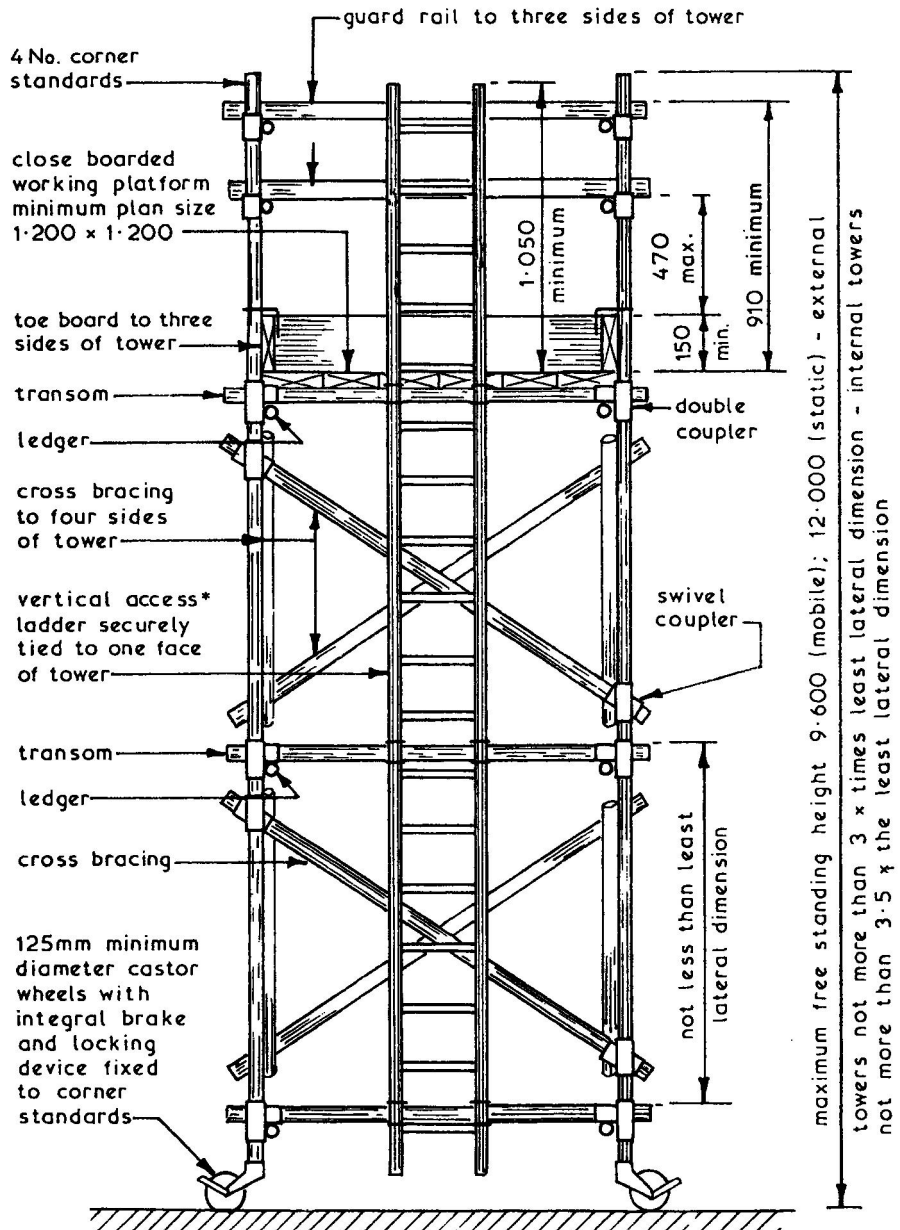
guard rail to three sides of tower
4 No. corner standards
close boarded working platform minimum plan size 1·200 × 1·200
toe board to three sides of tower
transom
ledger
cross bracing to four sides of tower
vertical access* ladder securely tied to one face of tower
transom
ledger
cross bracing
125mm minimum diameter castor wheels with integral brake and locking device fixed to corner standards
1·050 minimum
470 max.
150 min.
910 minimum
double coupler
swivel coupler
not less than least lateral dimension
maximum free standing height 9·600 (mobile); 12·000 (static) - external
towers not more than 3 × times least lateral dimension - internal towers
not more than 3·5 × the least lateral dimension